

FULL WIDTH WINDOW  
FLASHING BY WINDOW  
MFR/ SUPPLIER

SEALANT


SLOPE BRICK TO DRAIN  
1/4" / 3"

MORTAR / GROUT

MASONRY VENEER

SUPPORT TAB

3/8"

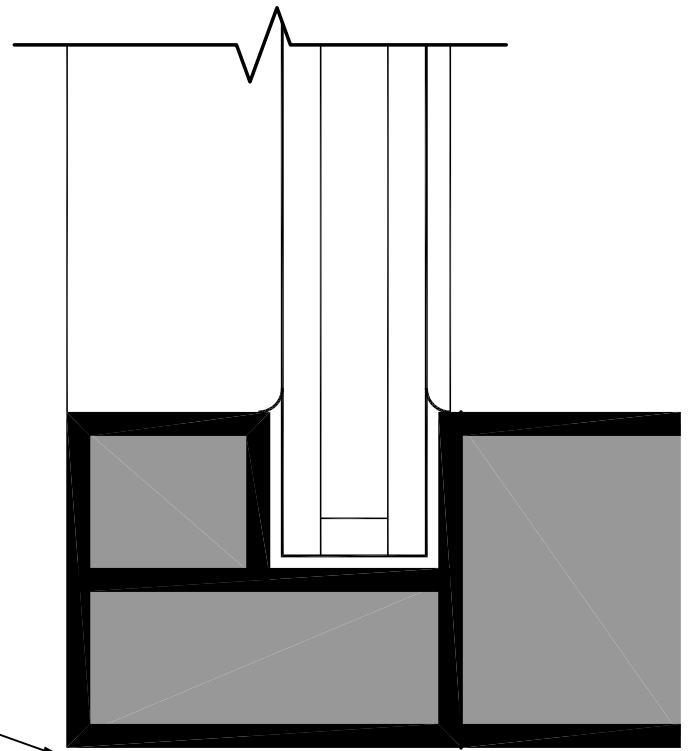

BLOCKING LEVEL W/  
TOP OF BRICK MINIMUM

MASTIC - SURROUND EACH  
NAIL / SCREW

NAIL / SCREW TO SET HEIGHT

MORTAR / GROUT FILL

SELF-ADHEREING FLEXIBLE  
FLASHING EXTEND OVER  
WINDOW FULL WIDTH

MASTIC - APPLIED IN DABS  
OR VERTICAL STRIPS - DO  
NOT APPLY HORIZONTALLY

TABS II PANEL

BUILDING WRAP

SUBSTRATE

SILL

# RECESSED WINDOW SILL DETAIL

#3200

SCALE: FULL

LAST REVISION: 02-10-05